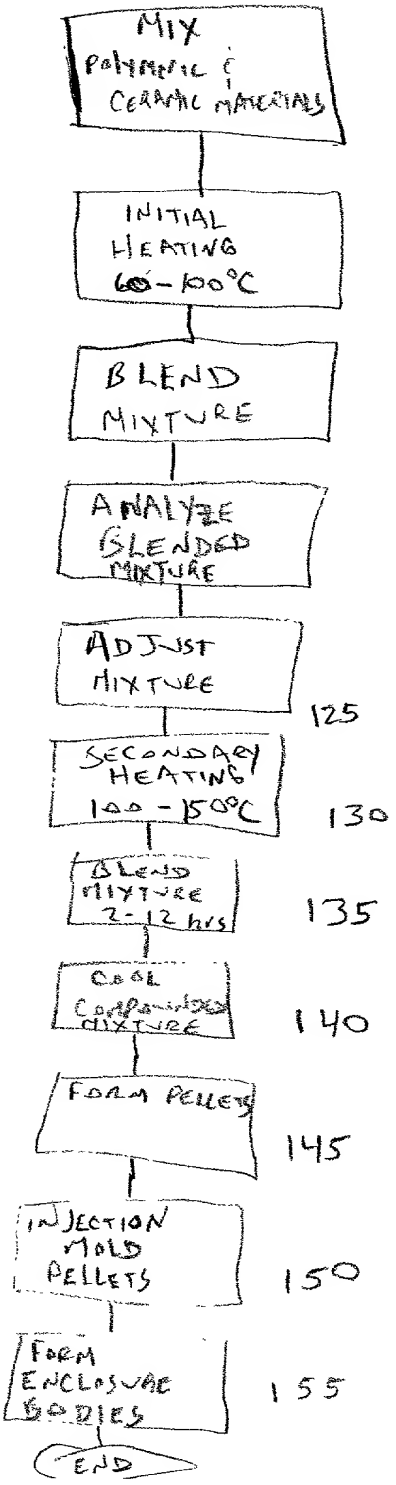
MIX
POLYMERIC & CERAMIC MATERIALS
105
INITIAL HEATING
60 - 100°C
110
BLEND MIXTURE
115
ANALYZE BLENDED MIXTURE
120
ADJUST MIXTURE
125
SECONDARY HEATING
100 - 150°C
130
BLEND MIXTURE
2 - 12 hrs
135
COOL
140
FORM PELLETS
145
INJECTION MOLD PELLETS
150
FORM ENCLOSURE BODIES
155
END

FIG. 1